


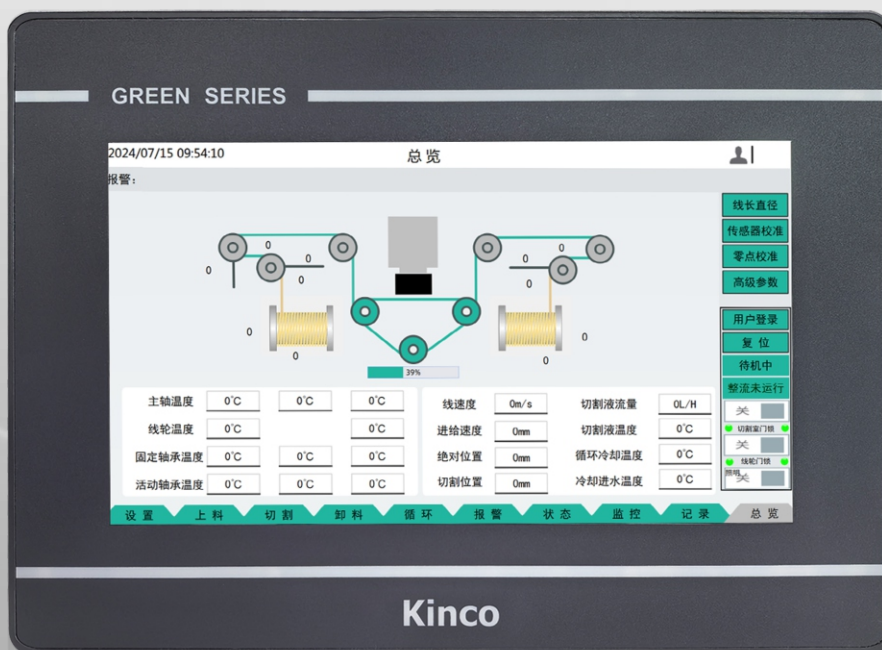

Kinco's new Gen industrial HMI

GREEN Series2nd Gen HMI

GL2070HE/GL2070HE-WIFI/GL2070HE-4G

Product Features

7-inch 1024*600 high-definition display with 16.77 million true colors.
85/85/85/85 wide viewing angle display.

Dual-core CPU with 256MB memory and 4GB flash storage.

Single Ethernet port plus three serial ports,supporting dual RS485 applications.

Multiple networking options, Ethernet/Wi-Fi/4G to choose from freely.

Based on the latest EdgeAccess 2.0 version, enjoy seamless IoT connectivity.

Based on the latest Kinco Dtools Pro configuration software.

Kinco new generation configuration software:[Kinco Dtools Pro](#)

Office-style interface with a fresh and modern look
Tag variable configuration mode that is closer to ST language programming habits
Template configuration for a more efficient development experience








Kinco's new Gen industrial HMI

GL2070HE/GL2070HE-WIFI/GL2070HE-4G



Model specification	GL2070HE	GL2070HE-WIFI	GL2070HE-4G
Performance specifications			
Display size	7" TFT		
Display area	154.21(H)×85.92(V)		
Resolution	1024*600 pixel		
Display color	16.77 million true colors		
Display viewing angle	85/85/85/85 (left/right/up/down)		
Contrast ratio	800:1		
Backlight	LED		
Brightness	450cd/m2		
Backlight life	30000 hours		
Touch Panel	4 line precision resistance network (surface hardness 4H)		
CPU	ARMCort ex-A7DualCore 1GHz		
Memory	4GB eMMC+256MB RAM		
RTC	Built-in		
Extensible memory	1 USB Host,1 USB Slave(Type-C)		
Print port	USB Host/serial port		
Ethernet	10/100 Mbps		
Program download	USB Slave (Type-C)/U disk/Ethernet port		
Network access	Ethernet	Ethernet/WiFi	Ethernet/4G
Wi-Fi/wireless network band	None	IEEE802.11 b/g/n: 802.11b: max 17dBm 802.11g: max 17dBm 802.11n: max 17dBm	LTE-FDD Band 1/3/5/8, LTE-TDD Band 38/39/40/41 UMTS Band 1/8 GSM Band 3/8
VPN	Support HMI remote upload, download and screen monitoring, support PLC transparent transmission program upload, download and monitoring		
Communication port	COM0:RS232/RS485/RS422; COM1:RS485;COM2:RS232		
Electrical specifications			
Input power supply	DC10.8V ~DC28V		
Rated power	4.2W@DC 24V		
Allowable loss of power	<3ms		
Insulation resistance	Over 50MΩ@500V DC		
Pressure resistance test	500V AC 1minute		
Structure specifications			
PCB	None		
Shell material	Engineering plastic		
Overall dimension (mm)	204mm*150mm*37mm		
Cut-out dimension (mm)	192mm*138mm		
Weight(kg)	0.5kg		
Environmental specification			
Working temperature	0 ~50℃		
Working humidity	10~90%RH (Non-condensing)		
Storage temperature	-20~60℃		
Storage humidity	10~90%RH (Non-condensing)		
Sine vibration test	10 ~500Hz,30m/s ² , X,Y,Z direction/hour		
Cooling mode	Natural air cooling		
Product certification			
Panel protection grade	Conforming to IP65 requirements		
CE certificate	EN61000-6-4:2007+A1:2011, EN61000-6-2:2005		
Software			
Configuration software	Kinco DToolsPro V1.7.5 or above		



Kinco® Automation

<https://en.kinco.cn> Email: sales@kinco.cn

(All trademarks and logos in this brochure are property of and registered by their respective owners.)